


Installation Illustration of Logic Control Circuit Board



3-level adjustable signal level threshold switch. The switch on the left controls the Gold Finger, and the switch on the right controls the msata interface direction. Left: 1.8V, Middle: 3.3V, Right: 2.5V. The default configuration is 3.3V, which is the middle position

For PC3000 Flash

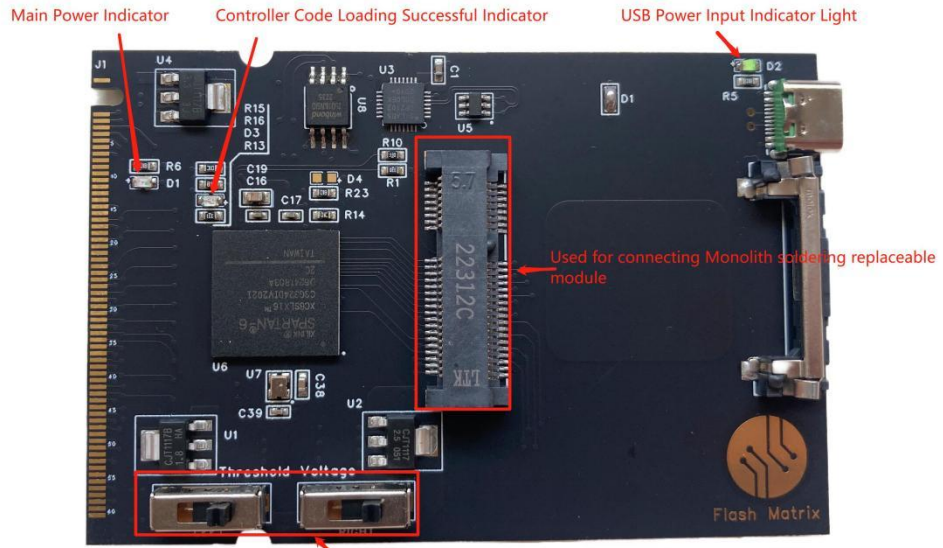


For Flash Extractor

Using Power Adapter Module



Using VCC Power 3.3V

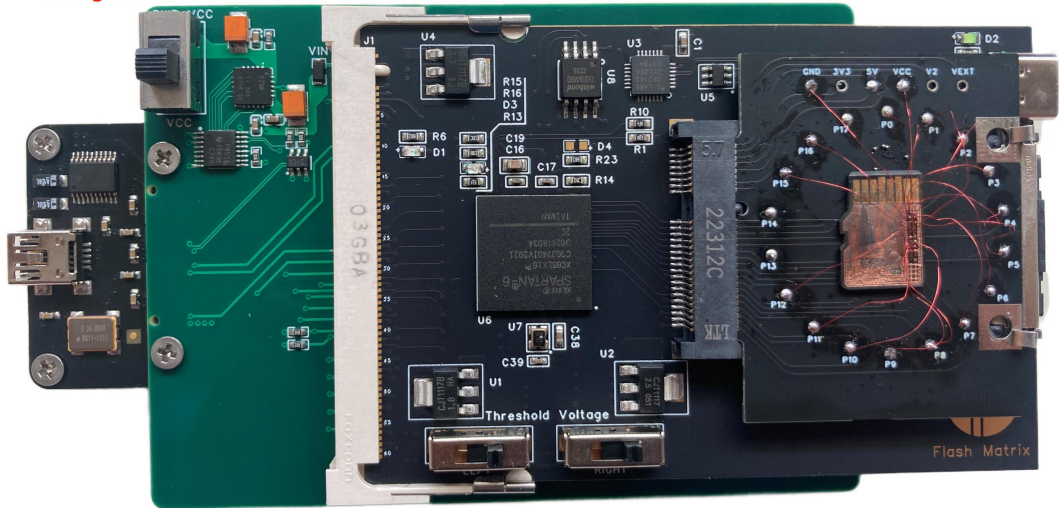

For VNR

